



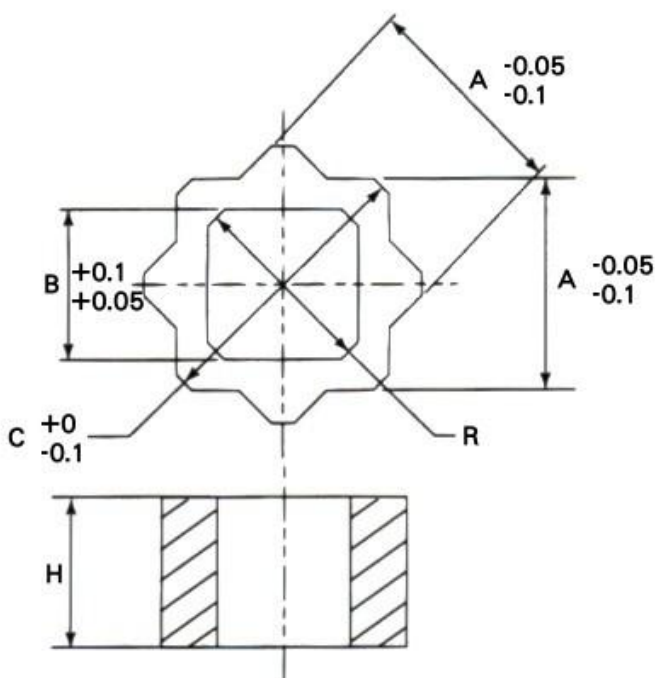


Metric" double square" actuator inserts

FEATURES

- Reduce Actuators ISO Output Shaft Broached Square Drive to Smaller ISO Square Stems.
- Iron-Based Powdered Metal Construction for High Strength.
- Fitted all C-MAX Pneumatic Actuators.

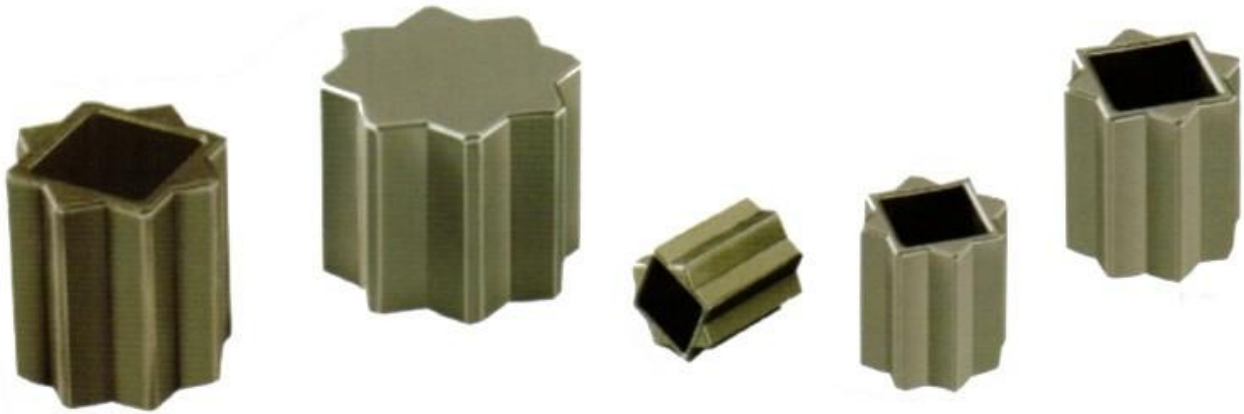

11M9 to 22M19 Design

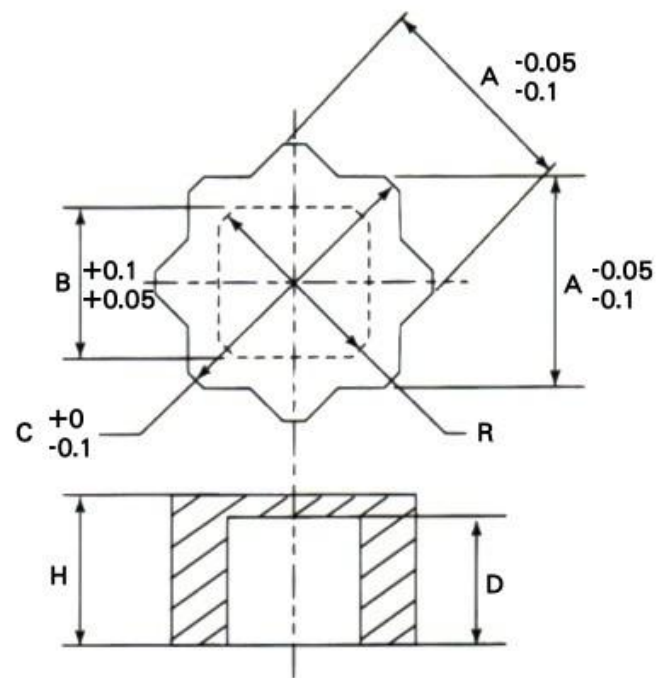

27M14 to 36M27 Design

DOUBLE-SQUARE INSERT DIMENSIONS (UNIT: MM)

INSERT	A	B	C	D	H	R
11M9	11	9	15.0	N / A	17.0	12.5
14M9	14	9	19.1	N / A	20.0	12.5
14M11	14	11	19.1	N / A	20.0	14.5
17M9	17	9	23.1	N / A	24.0	12.5
17M11	17	11	23.1	N / A	24.0	14.5
17M14	17	14	23.1	N / A	24.0	19.2

22M11	22	11	29.6	N / A	30.0	14.5
22M14	22	14	29.6	N / A	30.0	19.2
22M17	22	17	29.6	N / A	30.0	23.3
22M19	22	19	29.6	N / A	30.0	25.8
27M14	27	14	36.0	27.0	29.0	19.2
27M17	27	17	36.0	27.0	29.0	23.3
27M22	27	22	36.0	27.0	29.0	30.0
36M19	36	19	48.0	33.0	35.0	25.8
36M27	36	27	48.0	33.0	35.0	37.0