
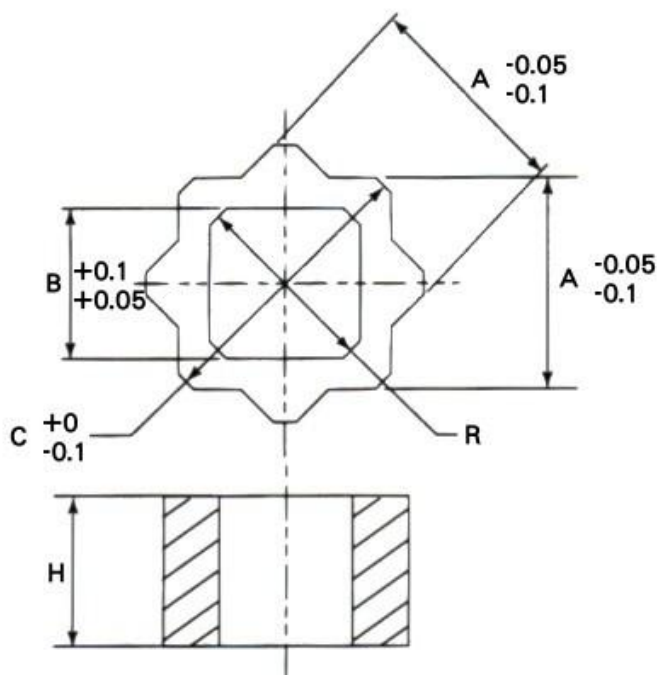



# 驅動器的助裝零件

## ● 特值：

當輸出軸尺寸不符合時，可用的助裝零件，耐高拉力鐵系粉末冶金，尺寸符合所有 C-MAX 氣動驅動器。

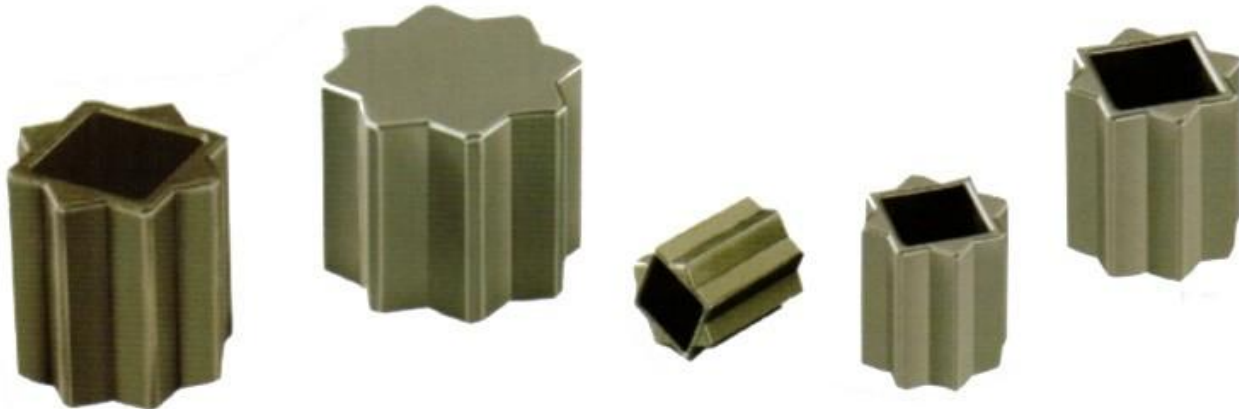

11M9 to 22M19 Design

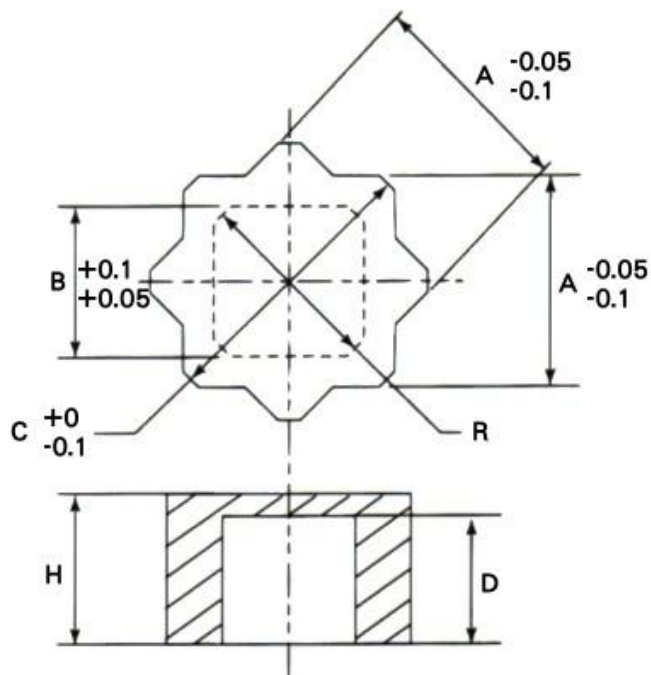

27M14 to 36M27 Design

雙方型零件尺寸：

單位：MM

| INSERT | A  | B  | C    | D     | H    | R    |
|--------|----|----|------|-------|------|------|
| 11M9   | 11 | 9  | 15.0 | N / A | 17.0 | 12.5 |
| 14M9   | 14 | 9  | 19.1 | N / A | 20.0 | 12.5 |
| 14M11  | 14 | 11 | 19.1 | N / A | 20.0 | 14.5 |
| 17M9   | 17 | 9  | 23.1 | N / A | 24.0 | 12.5 |
| 17M11  | 17 | 11 | 23.1 | N / A | 24.0 | 14.5 |
| 17M14  | 17 | 14 | 23.1 | N / A | 24.0 | 19.2 |
| 22M11  | 22 | 11 | 29.6 | N / A | 30.0 | 14.5 |

|       |    |    |      |       |      |      |
|-------|----|----|------|-------|------|------|
| 22M14 | 22 | 14 | 29.6 | N / A | 30.0 | 19.2 |
| 22M17 | 22 | 17 | 29.6 | N / A | 30.0 | 23.3 |
| 22M19 | 22 | 19 | 29.6 | N / A | 30.0 | 25.8 |
| 27M14 | 27 | 14 | 36.0 | 27.0  | 29.0 | 19.2 |
| 27M17 | 27 | 17 | 36.0 | 27.0  | 29.0 | 23.3 |
| 27M22 | 27 | 22 | 36.0 | 27.0  | 29.0 | 30.0 |
| 36M19 | 36 | 19 | 48.0 | 33.0  | 35.0 | 25.8 |
| 36M27 | 36 | 27 | 48.0 | 33.0  | 35.0 | 37.0 |